PREMIER®

MANUAL DE INSTRUCCIONES
REFRIGERADOR DE 2 PUERTAS

NV-1543...

Design - RUBY

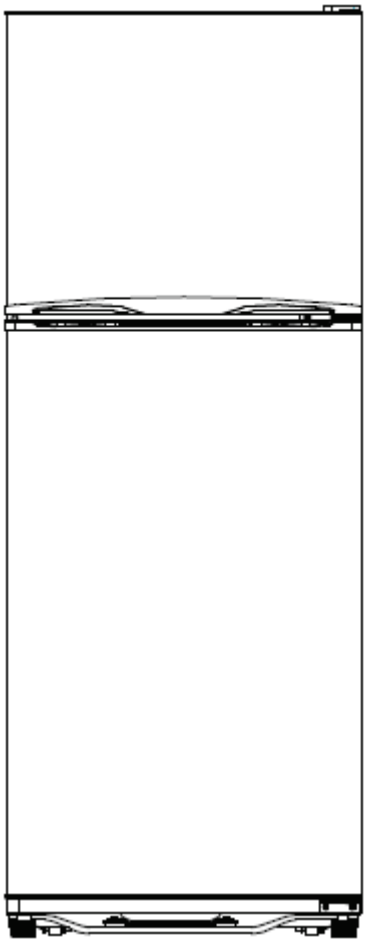

ESTIMADO CLIENTE

Con el fin de que obtenga el mayor desempeño de su producto, por favor lea este manual de instrucciones cuidadosamente antes de comenzar a utilizarlo, y guárdelo para su futura referencia.
Si necesita soporte adicional, no dude en escribir a: ***info@premiermundo.com***

ÍNDICE

INSTRUCCIONES DE SEGURIDAD 2
DESCRIPCIÓN 2
INSTRUCCIONES DE INSTALACIÓN 3
INSTRUCCIONES DE OPERACIÓN 4
CONSEJOS ÚTILES 5
MANTENIMIENTO 6
ACCESORIOS 6
MANIFESTACIONES NORMALES 7
RESOLUCIÓN DE PROBLEMAS 7
ESPECIFICACIONES 8
DIAGRAMA ELÉCTRICO 8

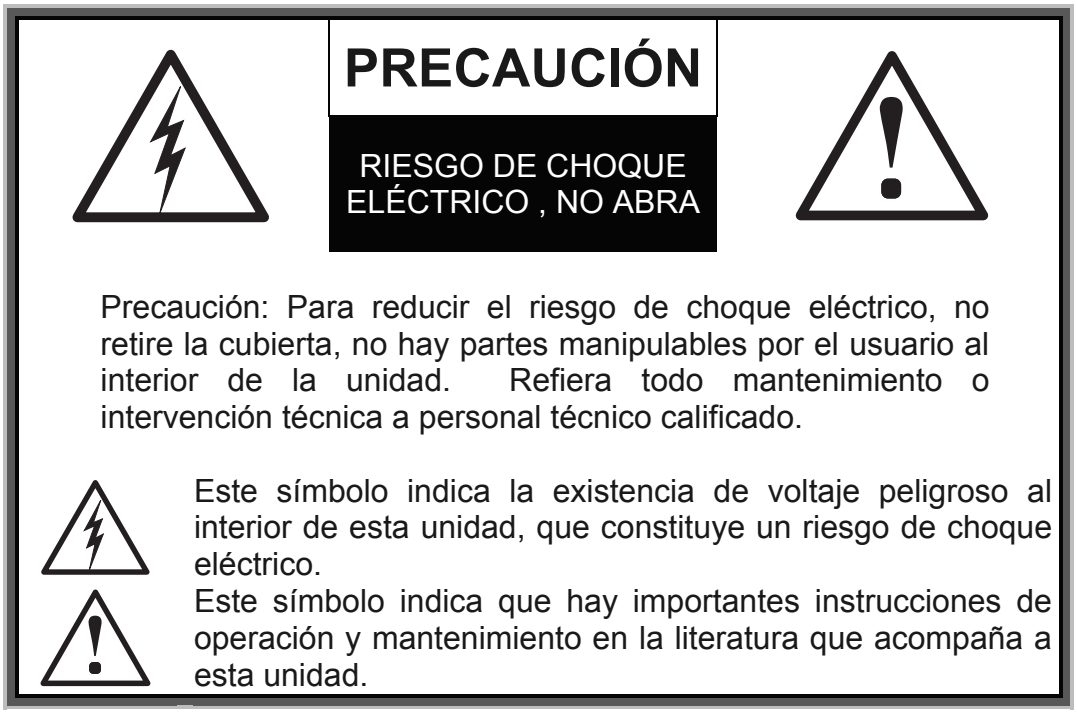
PRECAUCIÓN
RIESGO DE CHOQUE ELÉCTRICO , NO ABRA
Precaución: Para reducir el riesgo de choque eléctrico, no retire la cubierta, no hay partes manipulables por el usuario al interior de la unidad. Refiera todo mantenimiento o intervención técnica a personal técnico calificado.
Este símbolo indica la existencia de voltaje peligroso al interior de esta unidad, que constituye un riesgo de choque eléctrico.
Este símbolo indica que hay importantes instrucciones de operación y mantenimiento en la literatura que acompaña a esta unidad.

LÍNEAS DE SERVICIO AL CLIENTE PREMIER

Venezuela:	0800 – ELECTRIC (353-2874)
Panamá:	300-5185
Sitio Web:	www.premiermundo.com
E-mail:	servicioalcliente@premiermundo.com

NOTA
Nos reservamos el derecho de modificar las especificaciones, características y/u operación de este producto sin previo aviso, con el fin de continuar las mejoras y desarrollo del mismo.

⚠INSTRUCCIONES DE SEGURIDAD

- La unidad no debe ser utilizada por personas (incluyendo niños) con capacidades físicas o mentales reducidas, falta de experiencia o conocimiento a menos que reciban instrucción y tengan supervisión en cuanto al uso de la unidad por parte de una persona responsable de su seguridad.
- Los niños deben ser supervisados para asegurar que no jueguen con la unidad.
- Si el cable de poder está dañado debe ser reemplazado por el fabricante o un agente de servicio autorizado.
- La unidad está diseñada para ser utilizada en interiores en lugares como cocinas en tiendas, oficinas, fincas, hoteles, etc.

DESCRIPCIÓN

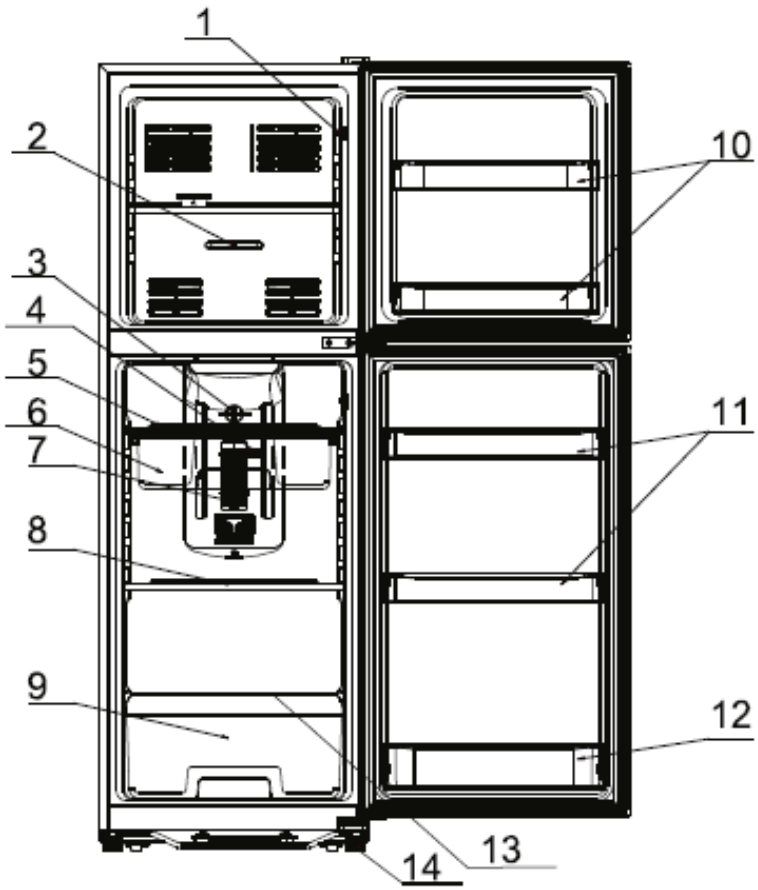

1. Interruptor del motor
2. Control de temperatura de congelador (B)
3. Control de temperatura de refrigerador (A)
4. Control de temperatura de compartimiento frío (C)
5. Repisa de vidrio de compartimiento de temperatura variable
6. Compartimiento frío
7. Tapa de lámpara
8. Repisa de vidrio
9. Canasta de vegetales
10. Barandilla de puerta de congelador
11. Barandilla de puerta de refrigerador
12. Botellero
13. Tapa de canasta de vegetales
14. Patas ajustables

INSTRUCCIONES DE INSTALACIÓN

1. Coloque la unidad sobre una superficie completamente plana y rígida. Nivel el refrigerador girando las patas ajustables en las esquinas inferiores. Ahora el refrigerador está en una posición segura.
2. Deje al menos 2 cm libres a cada lado del refrigerador y al menos 30 cm en la parte superior de tal forma que el refrigerador no toque ninguna de las partes que lo rodean.
3. Elija una ubicación del refrigerador no esté expuesto a los rayos del sol, que esté relativamente libre de humedad, calor y polvo y que ofrezca buena ventilación.



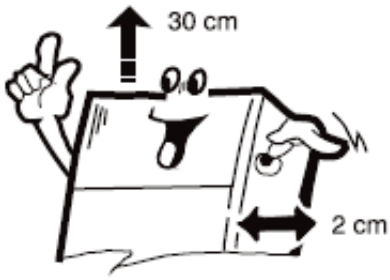

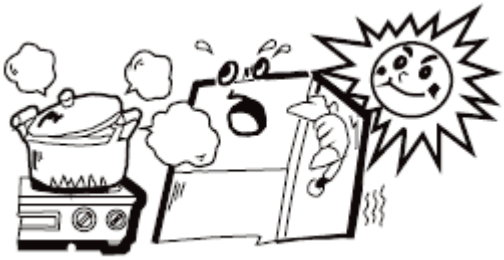

Importante

- El cable de poder debe estar conectado a un único enchufe, ya que el uso de un adaptador de extensión puede causar sobrecalentamiento.
- No guarde materiales inflamables tales como éter, bencina, gas LP o pegante dentro del refrigerador.
- Mantenga la unidad fuera del alcance de los niños.

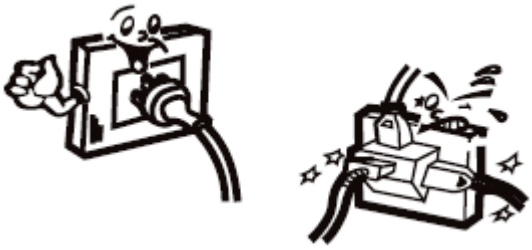

- Recuerde que si el cable de poder está dañado debe ser reemplazado por personal técnico calificado con el fin de evitar accidentes.
- No intente reparar la unidad usted mismo. Remita toda revisión, mantenimiento o reparación a personal de servicio técnico calificado.
- No arroje agua en el refrigerador ya que esto puede causar mal funcionamiento o choque eléctrico.
- Si observa alguna fuga de gas del contenedor no desconecte el cable de poder ya que las chispas podrían generar un incendio.

INSTRUCCIONES DE OPERACIÓN

AJUSTE DE TEMPERATURA

Propósito de uso	Posición del botón		
	A	B	C
Operación normal	4-5	Mitad	
Máximo enfriamiento en ambos compartimentos	7	Izquierda	
Máximo enfriamiento en compartimento de congelador	7	Derecha	
Máximo enfriamiento del compartimento de refrigerador	7	Izquierda	
Compartimiento frío a 0ºC			Mitad
Compartimiento frío por encima de 0ºC			Izquierda
Compartimiento frío por debajo de 0ºC			Derecha

Nota
Usted puede ajustar la temperatura de acuerdo con los alimentos almacenados presionando el botón blanco dentro del compartimiento frío. La temperatura varía entre -2ºC y 3ºC.
Coloque en la posición “1” si desea detener refrigerador por un corto tiempo.

CONGELAR
Congelar las carnes frescas ayuda a mantener sus nutrientes.

UBICACIÓN DE LAS COMIDAS
- Mantenga el compartimiento de enfriamiento cerca de 0 °C para un mejor almacenamiento de carnes, pescados, mariscos y leche. El periodo óptimo de almacenamiento es de tres días.
- Permita que exista espacio libre entre los alimentos para mantener la circulación de aire frío.
- Los elementos deben envolverse con el fin de evitar que se sequen y generen olores.
- Los alimentos calientes deben enfriarse primero antes de ser colocados en los compartimientos. De lo contrario para enfriarlos la unidad debe consumir más energía eléctrica.

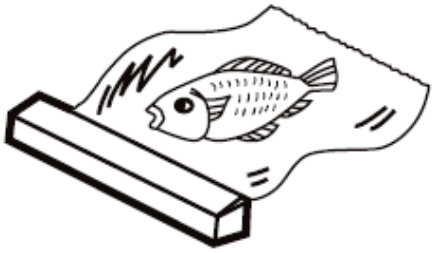

REFRIGERACIÓN

Las frutas y vegetales deben ser almacenados en el compartimiento de vegetales. Envuélvalos en un papel de preservación con el fin de evitar que se sequen.

Los alimentos ricos en agua tales como los frijoles y vegetales deben ser almacenados en la parte inferior del refrigerador con el fin de evitar que se congelen.

DESCONGELAMIENTO AUTOMÁTICO

Usted puede utilizar la función de descongelamiento automático del sistema para descongelarlo de una manera muy sencilla y práctica.

CONSEJOS ÚTILES

- Entre más alimentos se coloquen en el refrigerador y entre más veces se abran las puertas, más energía eléctrica consume la unidad. Evite saturarla de alimentos y abra las puertas solamente cuando sea necesario.
- Evite colocar objetos muy pesados, puntiagudos o corrosivos en el refrigerador.
- Permita que transcurran al menos 10 minutos para conectar de nuevo la unidad después de haberla desconectado.
- No guarde botellas de vidrio en el congelador con el fin de evitar que se rompan.
- No toque los contenedores o los alimentos en el interior de la unidad con las manos mojadas con el fin de evitar quemarse por escarcha.

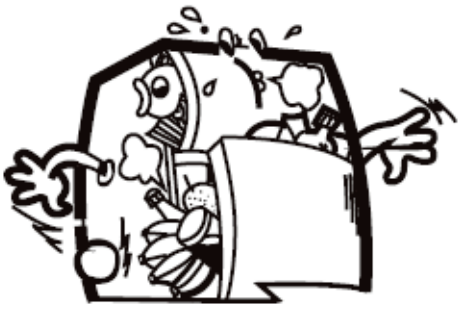

MANTENIMIENTO

- Desconecte la unidad antes de iniciar la limpieza. Utilice una prenda suave con limpiador natural y luego enjuague con agua limpia.
- No utilice productos químicos abrasivos tales como tiner, alcohol, productos de petróleo y agua caliente ya que pueden dañar el acabado y las partes plásticas de la unidad.
- La bandeja de drenaje debe limitarse al menos vez al año.
- Si el refrigerador no se va a usar por un tiempo prolongado, desconecte el cable, limpie el interior y cierre las puertas firmemente.
- Los empaques de la puerta se ensucian con facilidad. Límpielos con frecuencia.

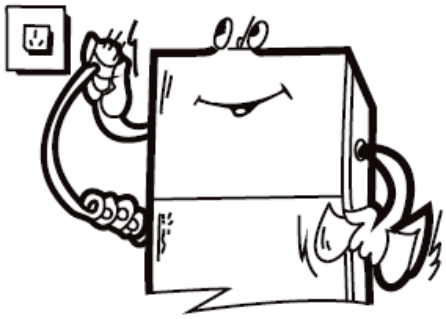

ACCESORIOS

- Para retirar la repisa lateral, dóblela y hálela hacia arriba de manera plana. Instálela de nuevo con el proceso inverso.
- La bandeja de drenaje está instalada sobre el compresor. Retírela horizontalmente con cuidado evitando golpear el tubo para evitar causar ruidos en la operación.
- Si necesita reemplazar el bombillo desconecte la unidad, retire la cubierta, retire el bombillo dañado, coloque el nuevo bombillo y la tapa. El bombillo es de 10W.



Repisa



Bandeja de Drenaje

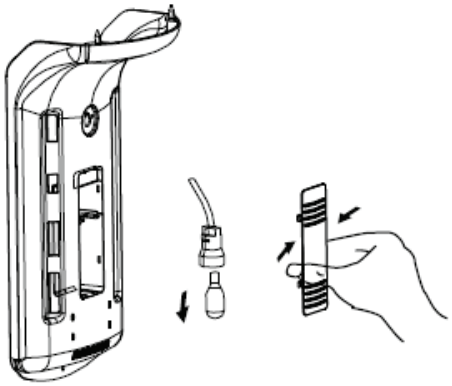

Bombillo

MANIFESTACIONES NORMALES

- Las partes laterales del refrigerador se calientan mientras que el condensador está trabajando, pero esto no afecta el desempeño en el interior.
- La unidad necesita un tiempo para que la temperatura del congelador y el refrigerador sea lo suficientemente fría cuando el refrigerador está trabajando. Si la temperatura de ambos compartimentos es alta cuando el refrigerador está trabajando, la unidad necesita un tiempo para que ambas temperaturas en los compartimentos se reduzcan.
- La superficie del compresor se pone muy caliente. Es normal que la superficie del compresor se caliente en condiciones óptimas de operación. No la toque con las manos.
- Usted puede escuchar sonidos de agua fluyendo el cual se debe al gas refrigerante circulando por la unidad. Esto es normal.
- La unidad puede generarse condensación en la parte exterior y esto sucede cuando la humedad es muy alta. Es similar como cuando se coloca hielo dentro de un vaso. Simplemente seque la parte exterior con un trapo.

RESOLUCIÓN DE PROBLEMAS

Esta lista es para ayudarle a resolver problemas simples que pueden presentarse en el uso del producto. Por favor léala y verifique estos puntos antes de solicitar ayuda de personal de servicio técnico autorizado.

PROBLEMA	**CAUSA Y SOLUCIÓN**
La unidad no está refrigerando	Verifique si hay una falla eléctrica. Verifique que el cable de poder esté bien conectado. Verifique que el fusible no esté quemado.
La unidad no refrigerara los suficiente	Los alimentos pueden estar demasiado juntos lo cual bloquea el flujo de aire frío. Usted puede haber colocado algo caliente en el refrigerador. El control de temperatura no está bien ajustado. Las puertas no están bien cerradas. El refrigerador no está bien ventilado. Hay muy poco espacio entre el refrigerador y las superficies exteriores.
La comida se está congelando en el compartimento del refrigerador	El control de temperatura está demasiado alto. La temperatura ambiente puede ser muy fría por debajo de 5 °C. Los alimentos están demasiado juntos.
Hay fugas de agua en el compartimento del refrigerador	El tubo de drenaje puede estar bloqueado. Puede haber fugas de los alimentos almacenados.
Hay ruidos	Verifique la instalación firme del refrigerador. Verifique que el refrigerador no esté siendo golpeado o tocado por otros objetos.
El compresor no se detiene automáticamente	Puede haber demasiada comida al mismo tiempo. Se abren con demasiada frecuencia las puertas o por mucho tiempo. Los controles de temperatura de los compartimentos del congelador y el refrigerador están en la posición más fría.

ESPECIFICACIONES

Voltaje	AC 115V/60Hz
Potencia	165W
Refrigerante	100g
Capacidad Neta	8.7 pies cúbicos
Tipo de Clima	ST

DIAGRAMA ELÉCTRICO

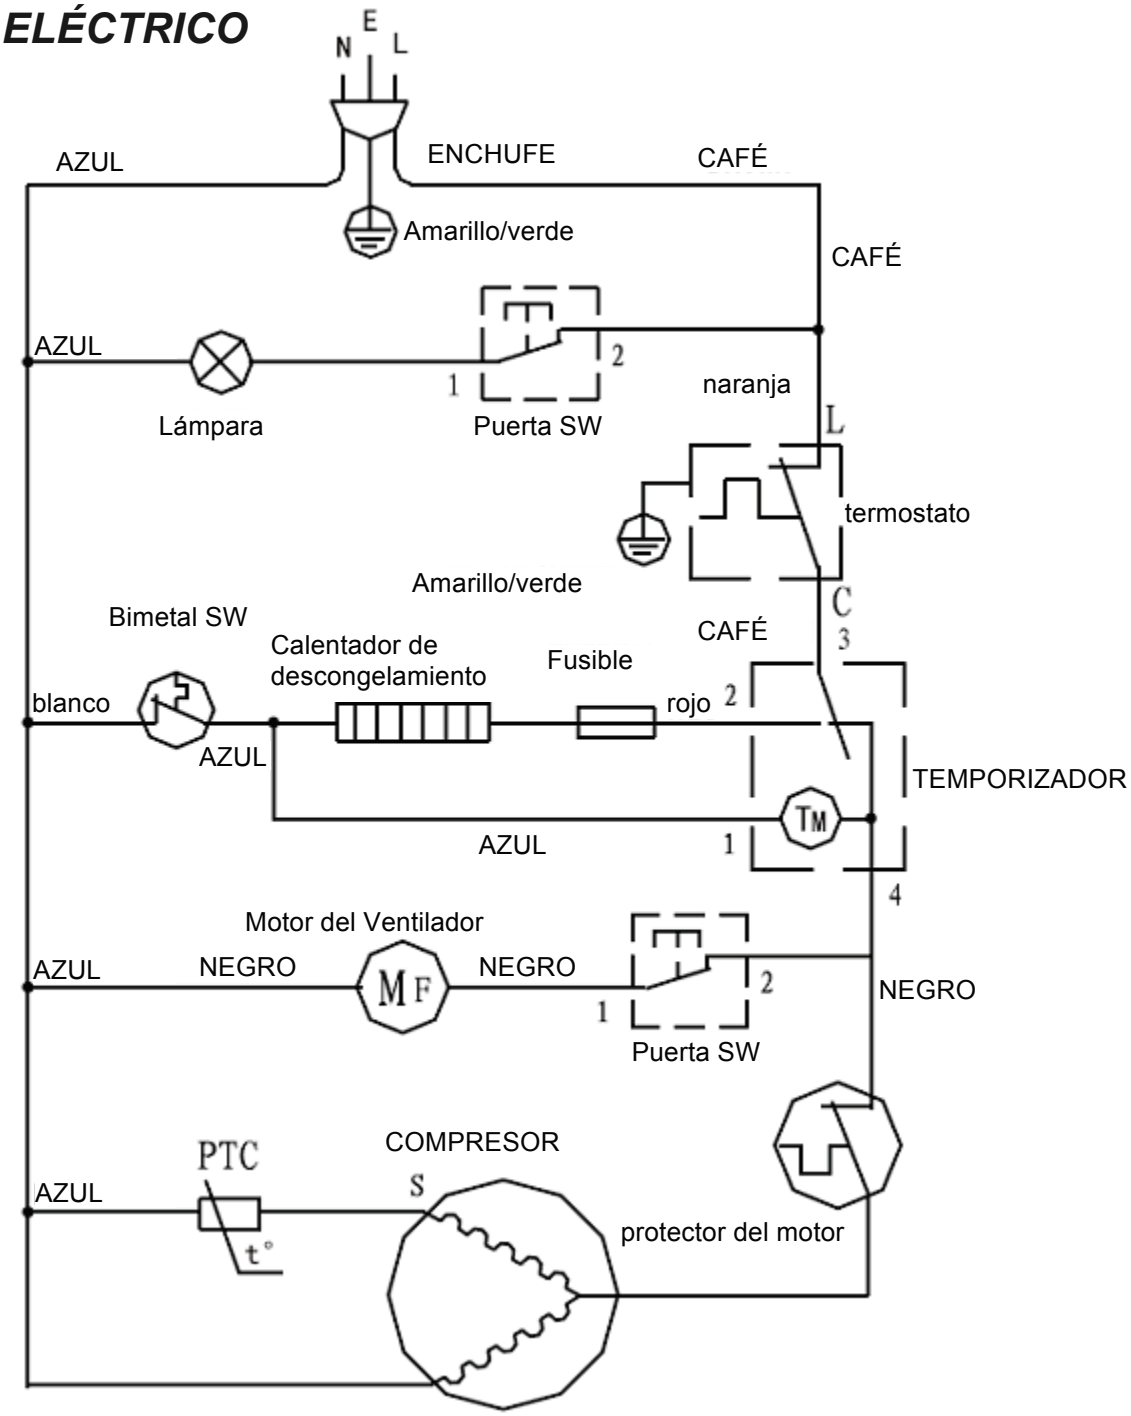

PREMIER®

INSTRUCTION MANUAL

2 Door Refrigerator

NV-1543...
Design-RUBY

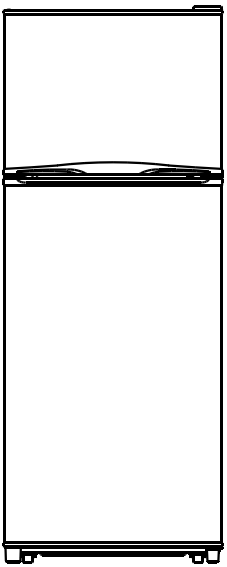

DEAR CUSTOMER

In order to achieve the best performance of your product,please read this instruction manual carefully before using, and keep it for future reference.
If you need extra support, please write to info@premiermundo.com

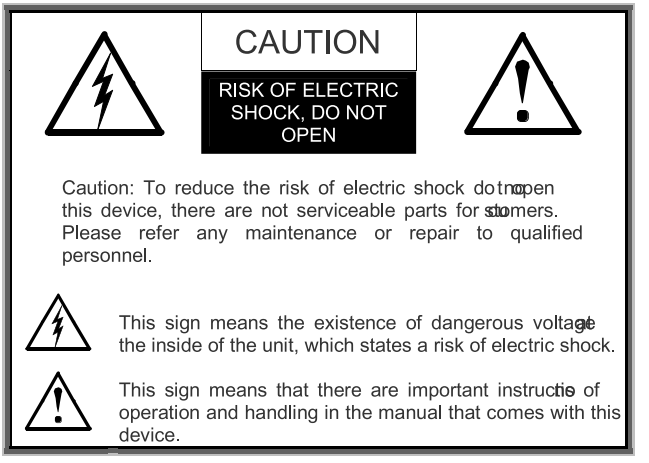
CAUTION
RISK OF ELECTRIC SHOCK, DO NOT OPEN
Caution: To reduce the risk of electric shock do not open this device, there are not serviceable parts for customers. Please refer any maintenance or repair to qualified personnel.
This sign means the existence of dangerous voltage inside of the unit, which states a risk of electric shock.
This sign means that there are important instructions of operation and handling in the manual that comes with this device.

PREMIER CUSTOMER SERVICE

Venezuela:	0800-ELECTRIC(353-2874)
Panama:	300-5185
Website	www.premiermundo.com
E-mail:	servicioalcliente@premiermundo.com

NOTE
This unit may be submitted to changes in specifications, characteristics and/or operation without prior notice to the user, in order to continue improving and developing its technology.

1、Structure Illustration

The sample cutline is representation of this series of refrigerator, which have similar structure and different capacity .

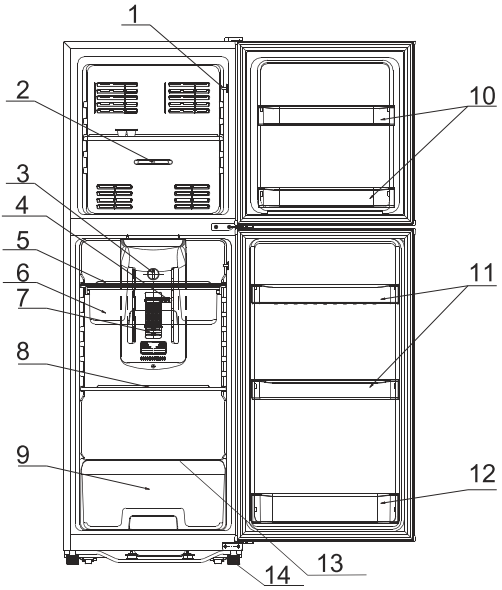

1. Fan motor switch
2. Freezer temperature control knob (B)
3. Refrigerator temperature control knob(A)
4. Chilled case temperature control knob(C)
5. Variable temperature compartment glass shelf
6. Chilled case
7. Lamp cover
8. Glass shelf
9. Vegetable basket
10. Freezer door rail
11. Refrigerator door rail
12. Bottle rack
13. Vegetable basket cover
14 Adjustable feet

PS: If we change some small parts of the refrigerator it is for you to use it more conveniently. Sorry for no giving notice.

2、Instructions for Installation

1.Install on a completely flat and rigid surface. Level the refrigerator by rotating the adjustable Legs located at the front two corners. The refrigerator is then securely positioned.



2.Leave at least 2 cm between both sides of the refrigerator and the wall, and at least 30 cm between the top of the refrigerator and the surface above, so that the refrigerator dose not touch any of the surrounding surfaces.



3.Choose a location which is not exposed to sunlight, is relatively free from dust, heat and humidity, and offers good ventilation.

3. Cautions for Safety

1.The power plug should have its own socket, as adapter may cause the socket to overheat.



2.Don't store inflammable materials such as ether, benzine, LP gas and glue, etc. in the refrigerator.

3.This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
Children should be supervised to ensure that they do not play with the appliance.

4.If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.

5.WARNING -- Customers should not attempt to replace or repair the power cord and the plug themselves .Only trained and qualified service personnel should repair or service refrigerator equipment.

3. Cautions for Safety

6.Don't splash water on the refrigerator, for this may cause malfunction or electric shock.

7. When gas leaks from its container, don't pull the plug, out or in, for it may arouse sparks and fire calamities.

4. Usage Instructions

1.Temperature adjustment

Purpose of Usage	Position of Dial		
	A	B	C
Normal operation	4-5	MED	
Maximum coldness in both compartments	7	Left	
Maximum coldness in freezer compartment	7	Right	
Maximum coldness in refrigerator compartment	7	Left	
Chilled case temperature is at 0℃			MED
Chilled case temperature is above 0 ℃			Left of MED
Chilled case temperature is below 0 ℃			Right of MED

NOTE:

The user can adjust the temperature according to the food stored by pressing the white button inside the drawer.The temperature ranges from -2℃ ~3℃.

Please turn to "1" if you want to stop the refrigerator for a short time.

2.Freezing

- Meats frozen freshly can help maintain their nourishment.

RECOMMENDATIONS:

Never place ice cubes in the mouth or eat ice-lollies that have just been taken out from the freezer, as they may cause ice burns.

4. Usage Instructions

3.Placement of food

• Keep the chilled case at about 0℃, for best storing of meat, fish, shell-fish and milk. Optimal storing period is within three days.

4.Refrigeration

• Fruits and vegetables are to be stored in the vegetable case. Wrap them with fresh preservation paper to avoid drying.

• Water-rich foods such as bean curds and vegetable should be stored in the front bottom part of the refrigerator compartment to avoid being frozen.



5.Placement of food

• There should always be some space between food to maintain cold air circulation.

• Food should be wrapped tidily to avoid them from becoming dry and odorous.



• Hot foodstuffs should be cooled down before being placed in the compartments. Otherwise the internal temperature of the compartments or electric consumption will increase.

6.Automatic defrosting

Applying automatic defrosting system makes defrosting very convenient.

5. Cautions for Use

1.The more food stuff is put in the refrigerator or the more frequent and the longer the doors are opened, the more the electric consumption will be, which may eventually lead to malfunction

2.It is better not to place heavy pointed,or corrosive objects on the refrigerator.

3. Only replug the electric power after an interval of over ten minutes.



4. Don't store bottled drink in the freezer, so as to prevent them from being broken .

5.Open the doors as less as possible during power supply breakdown.

6.Don't touch food or containers in the interior compartment with your hands wet so as to prevent frost.

6. Maintenance

1.While cleaning the refrigerator, pull out the electric power plug, rub carefully with a piece of cloth socked with natural cleanser then wipe with clean water.



2.Cleansers such as soap powder, abrasive cleaning powder, alkali cleansers, chemical doth, thinner, alcohol, acid petroleum product and hot water should not be used to clean the refrigerator as they may damage the painted cover and plastics.

3.The drain pan should be cleaned at least once a year.

4.If the refrigerator is out of use for a long time, please pull out the plug, clean and dry the interior compartment, then close the doors tightly.

5.As the door gasket is easy to be dirtied and fogged, clean it frequently.



7. Installing and Removing the Accessories

1. To remove the slide shelf:
Grip the shelf, then lift it straight upward.
To reinstall, reverse the procedure.

2. To dismantle the flexible pocket: pull out the tray first then draw the pedestal of the pocket outward. Don't dismantle the tray and the pedestal at the same time.

3.The drain pan:
Pull out the drain pan horizontally.
To remove
Do not to hit the tubes - this could cause noisy operation later on.



4.If you need to replace the lamp,please according to below instruction:
A.Unplug the power first
B.Hold both sides of the lamp-chimney, take it out and follow the arrowhead direction as shown in the diagram.
C.Unscrew the old lamp and replace it with a new one
D.Install the lamp-chimney again.
Note:the lamp power is 10W.



8. The following cases are not malfunction

1.The sides of refrigerator heat up, while the condenser is working, but this will not influence on storage performance.
2.It takes a span of time for the temperature of the freezer and refrigerator compartments to become cold while the refrigerator is working: If the temperature of the two compartments are higher while the refrigerator is working, it takes a span of time for the temperature of the two compartments to decrease.
3.The surface of the compressor becomes hot: It is normal for the surface of the compressor to get hot in good working condition. Don't touch it with your hands.

8. The following cases are not malfunction

4.When you hear a sound like water flowing:
The sound like water flowing is actually the refrigerant(cooling gas) flowing. It does not indicate a malfunction.
5.When condensation forms on the outside of the refrigerator:
Condensation may form on the outside when the humidity is high e.g. during a wet season. This is the same as when ice water is poured into a glass. It does not, therefore, indicate a failure. Wipe the surface dry with a dry cloth.

9. Trouble Shooting

If any case of malfunction happens, please inspect and dispel it according to the methods shown in the following table:

Situation	Inspection
Not refrigerating	Check if there is a power failure. Check if the power cord is plugged into the power outlet. Check that the fuse (or circuit-breaker)has not blown.
Not cooling sufficiently	The food may be packed too tight together which block the flow of cool air. You may have put in something hot or a lot of food stuffs into the refrigerator. The temperature control dial may not have been set properly. The door may not have been closed properly. The door gasket may be damaged. The refrigerator may not be well ventilated. There may be insufficient space between the refrigerator and the surfaces immediate to the sides and top.
Foods frozen in the refrigerator compartment	Have the temperature controls of the compartment set to "7" position? Is the normal surrounding temperature bellow 5℃? Have the foodstuff been put too crowdedly?
Water leaks from refrigerator compartment	Is the drainage pipe blocked ? Is there any leakage from some objects stored in it?
Noises	Is the refrigerator installed firmly? Has the refrigerator been struck by some other objects?
Compressor does not stop working automatically	Is the food stored too much at one time? Are the doors opened too frequently or too long? Are the temperature controls of freezer and refrigerator compartments set to "colder"position?

If the above methods does not solve the problem, please contact the service centres for assistance without any delay.

VOLTAGE: AC115V/60Hz
POWER: 165W
REGRIGERANT: 100g
NET CAPACITY: 8.7Cu.ft
CLIMATIC CLASS: ST